


GRAPPIN HYDRAULIQUE AVEC ÉLECTRO-AIMANT



ROTATEUR

| | | | |
|--------|----|----|------|
| | | | |
| RT/503 | 16 | 13 | 1/2" |

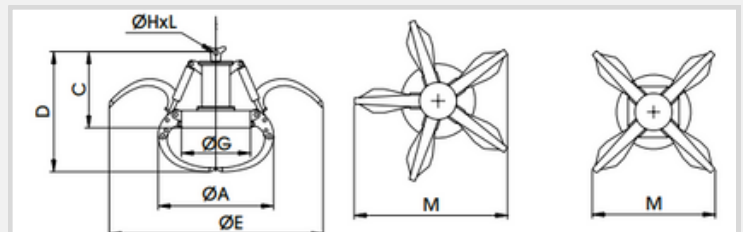

| | | | | | | | | | | | | | mm. | | | | | | | | | |
|--|----|-----|-----|---------|------|-----|-----|------|-----|------|-----|------|-----|------|------|-----|------|-------|-----|--------|-----------|--------|
| | N° | Lt | MPa | Lt/min. | | Kg | Kw | V.cc | Kg | Kg | Kg | ØA | C | D | ØE | ØG | M | ØHxL | Ton | | Ton | Ton |
| PH/4-25 | 4 | 250 | 25 | 60 | 1/2" | 280 | 0,5 | 24 | 230 | 2000 | 510 | 1010 | 740 | 1120 | 1910 | 600 | 1370 | 33x85 | 2,3 | - | 1,2 - 2,4 | 4 - 10 |
| PH/4-40 | 4 | 400 | 25 | 80 | 1/2" | 315 | 0,5 | 24 | 230 | 2000 | 545 | 1130 | 740 | 1210 | 2050 | 600 | 1500 | 33x85 | 2,3 | - | 1,6 - 2,8 | 4 - 10 |
| PH/5-25 | 5 | 250 | 25 | 70 | 1/2" | 325 | 0,5 | 24 | 230 | 2000 | 555 | 1010 | 740 | 1120 | 1910 | 600 | 1730 | 33x85 | 2,9 | - | 1,6 - 2,8 | 5 - 12 |
| PH/5-40 | 5 | 400 | 25 | 90 | 1/2" | 370 | 0,5 | 24 | 230 | 2000 | 600 | 1130 | 740 | 1210 | 2050 | 600 | 1870 | 33x85 | 2,9 | - | 1,6 - 2,8 | 5 - 12 |
| CON ROTATORE • WITH ROTATOR • AVEC ROTATEUR • CON ROTATOR | | | | | | | | | | | | | | | | | | | | | | |
| PH/4G-25 | 4 | 250 | 25 | 60 | 1/2" | 295 | 0,5 | 24 | 230 | 2000 | 525 | 1010 | 730 | 1110 | 1910 | 600 | 1370 | 30x97 | 2,3 | RT/503 | 1,2 - 2,4 | 4 - 10 |
| PH/4G-40 | 4 | 400 | 25 | 80 | 1/2" | 320 | 0,5 | 24 | 230 | 2000 | 550 | 1130 | 730 | 1200 | 2050 | 600 | 1500 | 30x97 | 2,3 | RT/503 | 1,6 - 2,8 | 4 - 10 |
| PH/5G-25 | 5 | 250 | 25 | 70 | 1/2" | 340 | 0,5 | 24 | 230 | 2000 | 570 | 1010 | 730 | 1110 | 1910 | 600 | 1730 | 30x97 | 2,3 | RT/503 | 1,6 - 2,8 | 5 - 12 |
| PH/5G-40 | 5 | 400 | 25 | 90 | 1/2" | 385 | 0,5 | 24 | 230 | 2000 | 615 | 1130 | 730 | 1200 | 2050 | 600 | 1800 | 30x97 | 2,3 | RT/503 | 1,6 - 2,8 | 5 - 12 |

