



I.450

EUROMECC

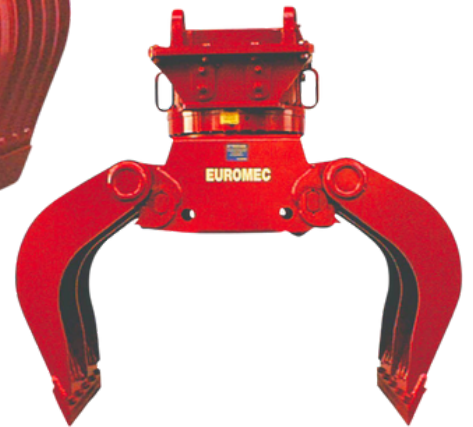

PINCE HYDRAULIQUE DE DÉMOLITION ET DE TRI.

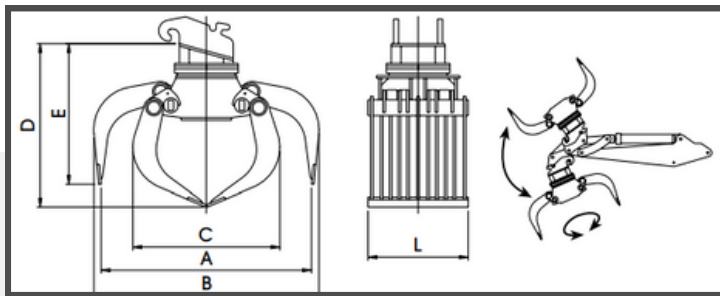

Grapple Icon	Lt	Kg	MPa	KG	Lt/min.	Hydraulic Cylinder	ROTATION 360°			mm.						Ton
							MPa	Lt/min.	Hydraulic Cylinder	A	B	C	D	E	L	
I.450/22	220	820	30	3300	40	1/2"	12	10	3/8"	1800	1840	1080	1260	1050	600	9 - 15
I.450/50	500	950	28	3550	50	3/4"	12	10	3/8"	1800	1800	1230	1490	1320	850	12 - 17
I.450/60	600	1010	28	3550	50	3/4"	12	10	3/8"	1800	1800	1230	1490	1320	1000	14 - 20
I.450/80	800	1480	28	5900	80	3/4"	12	10	3/8"	2000	2060	1360	1760	1580	1000	16 - 24
I.450/100	1000	1610	28	5320	80	3/4"	12	10	3/8"	2200	2280	1490	1900	1650	1000	18 - 30
I.450/115	1150	1770	28	5320	80	3/4"	12	10	3/8"	2200	2280	1490	1900	1650	1150	20 - 32
I.450/130	1300	1850	28	5320	80	3/4"	12	10	3/8"	2200	2280	1490	1900	1650	1300	23 - 37

